

Workbench machine for contour chamfering.

Its 450-W motor can carry out chamfers of 0 to 2 mm on flat surfaces on all types of materials.

A rolling bearing guides the workpiece to be chamfered.

The chamfer value is set using a vernier (1 rotation = 0.2 mm).

CM 200	Ref.
CLASSIC	AZ-092
TRONIC	AZ-094


Capacity on flat surface: 0-2 mm at 45°
 Carbide cutter : at 45°
 Table : 260 x 260 mm
 Weight: 15 kg
 Protection screen
 Chip aspiration
 via Venturi system
 (chip collection bag available as an option)

Cutter	AZ-660
Chip collection bag	VM-570



CM 200 CLASSIC AZ-092


Electronic variable-speed motor with foot pedal.
 The foot pedal is equipped with an adjustable 5-position speed limiter and a manual variable-speed control button

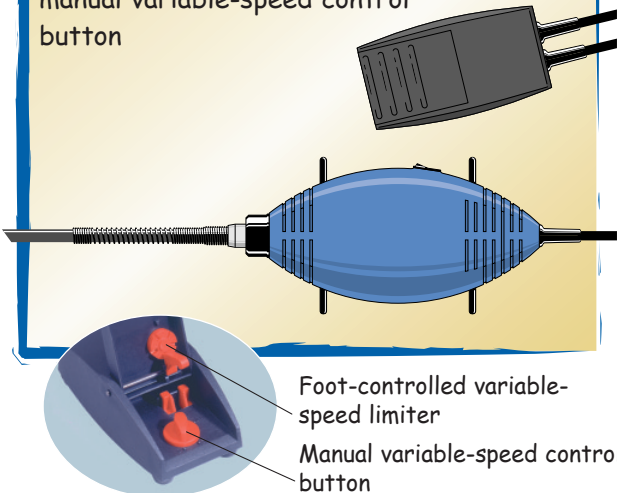

Foot-controlled variable-speed limiter
 Manual variable-speed control button

CM 200 TRONIC AZ-094

Motor with electronic speed regulator, with manual control via indexed adjustment wheel.

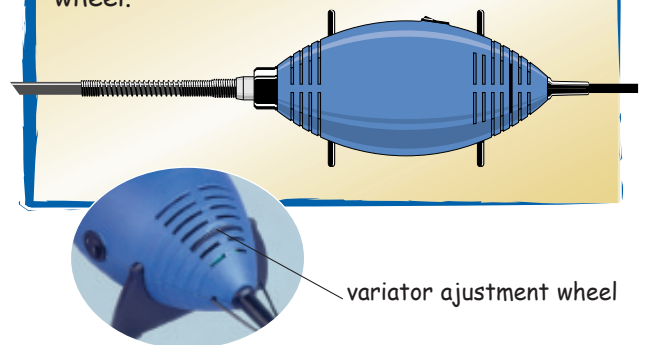

variator adjustment wheel

SIMPLE AND PRECISE ADJUSTMENT
 PROTECTION SCREEN
 CHIP ASPIRATION
 LARGE WORKING AREA

